
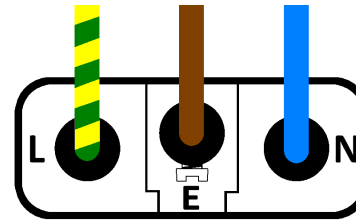


Wiring guide: Promatic Trap Control boxes


Warning: Disconnect Battery (or Transformer) before working on trap wiring !

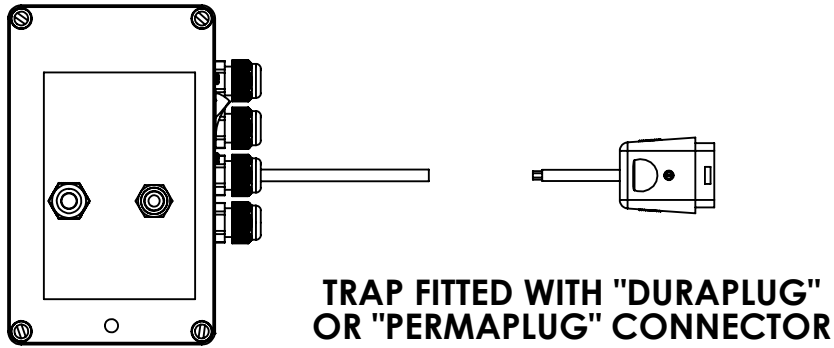

Wiring side of socket

Pin L - Green/Yellow
Pin E - Brown
Pin N - Blue

Note: Pin E may be marked \perp

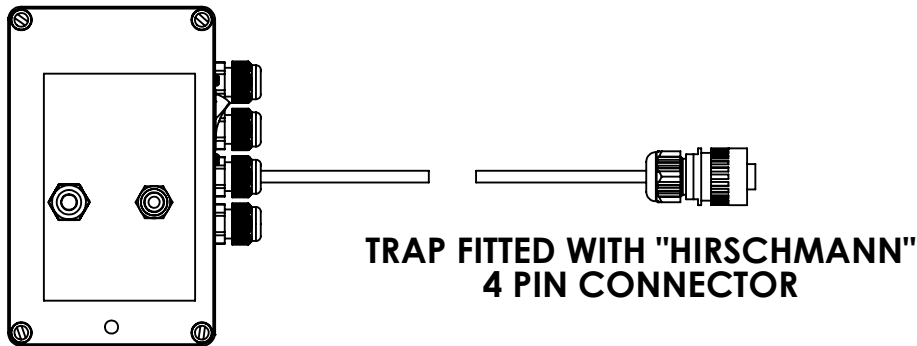


Wiring side of socket

Pin 1 - Brown
Pin 2 - Green/Yellow
Pin 3 - Blue
Pin 4 - Not used

Note: Pin 4 marked \perp

Assemble socket components as shown, use the rubber insert with the smaller centre hole (discard the other one)
After wiring fit the front section to the body and screw together firmly before tightening the rear gland nut.

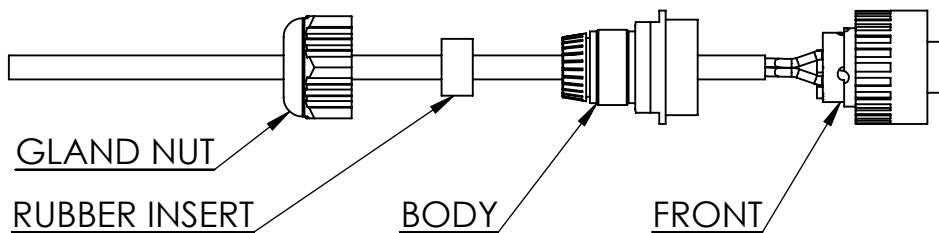

Promatic International Ltd.
Station Works
Hooton
South Wirral
CH66 7NF
www.promatic.co.uk
Helpline: 44 (0)151 327 2220

Promatic Inc.
801 MID AMERICA DRIVE
PLATTSBURG, MO 64477
www.promatic.biz
Helpline: 1 888 767 2529 (Toll free)

